

EN60598 IK09



ARE 2076 06 740 07 550 7D24

AREDO Design

The technical look in a compact design makes AREDO DESIGN a versatile lighting solution for main and side roads in conformity with EN13201 and also pedestrian crossings. AREDO DESIGN is designed for intuitive installation, making it the quick and efficient option. The ballast service is also 100% tool-free, which means that it can also be done in next-to-no-time.



Technical Data

Material	Die-cast aluminium
Housing color	RAL 7024
Glass cover	safety flat glass
Application / optics	narrow street -S / O7
LED lifetime	L80 B10 > 150 000 h
SDCM	MacAdam 5
Mounting	Side entry / Post top combined
Bracket diameter	42 / 60 / 76 mm (to be defined at order)
Tilting angle	+15° to -15°, at 5° steps
Weight	11 kg
Windage Area	0,042 m ²
Temperature	-40°C bis +50°C
Nominal voltage	220 - 240 VAC 50/60 Hz

Specific data


Color temperature	4000 K
CRI	75
System light output	18.587lm
Power consumption	124 W
Lens	Ledil Strada
LED Chip	Osram Oslon
System efficacy	149,9 lm/W
LED current	525 mA
cos Phi	0,98
Driver typ	Td135 ¹
Surge protection	10 kV / 6 kV
Inrush current	50 A

* Functions (more on request)

- 41 on / off
- 45 Luna Dimmer
- 53 Dali integrated

all values at Ta =50°C

¹ Common Mode / Differential Mode

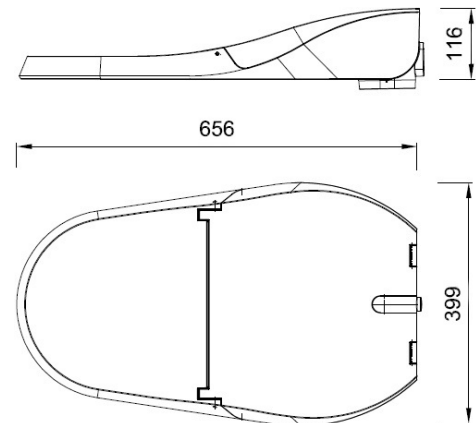

Dimensional Drawing in mm